



TITAN 265/230/200

PAPER CUTTERS



ASSURANCE YOU MADE
THE RIGHT DECISION

TITAN 265/230/200 PROGRAMMABLE

The Titan series paper cutters continue the Challenge tradition of innovation, delivering large cutter features in 26-1/2"/67.3 cm, 23"/58.4 cm, and 20"/50.8 cm cutting widths. The Titan paper cutters offer many sophisticated yet easy to use control features in convenient small format sizes.

STANDARD FEATURES

- Hydraulic Powered Clamping and Cutting
- Adjustable Clamp Pressure
- Computer Backgauge Control
- Convenient Measurement conversion
 - Metric/English/Fractions
- Program Memory Lock
- Multiple Safety Systems
 - › Light Beam curtain system protecting the cutting area
 - › Mechanical knife safety latch
 - › Two-Hand monitored cut buttons
 - › Enclosed rear table
 - › Slot Closure device over table slot
 - › Push-Out Function
- Pre-clamping - powered for 265, manual for 200 and 230
- Computer Diagnostics
- Two knives, three cut sticks, wood jogging aid, tool kit, and operators manual
- Manufactured in the USA
- 2-year warranty
-   **CE** certified

DURABLE


As the first manufacturer of paper cutters in the world (since 1887), Challenge is well known for building machines that last, making our cutters one of the most economical machines available. The Titan's solid cast iron and steel construction provides years of quality cutting. Our solid one inch thick metal tables provide a strong work surface necessary in a production environment.

SAFE

Standard safety features include CE and ANSI standard compatible **light curtain system** to protect the operator in the cutting area. These self-monitoring beams ensure the highest degree of safety for the operator. A dedicated **push-out key** moves the stock forward allowing the operator to handle the stock without placing his/her hands under the clamp and knife. **Fully enclosed rear tables** and a **table slot cover** protects the operator from possible pinch points. All Titan cutters are **UL, cUL, CE and ANSI certified** through United Laboratories ensuring that Challenge cutters are made to the highest safety standards available in the market.

CONTROL

The **line-light cut position indicator** projects a line of light on the surface of the stock to quickly and accurately position each cut by sight. A **low pressure foot pedal clamping** system gives the operator safe control of the clamp when pre-cut clamping is needed, such as holding slick stock in place or verifying a cut position.

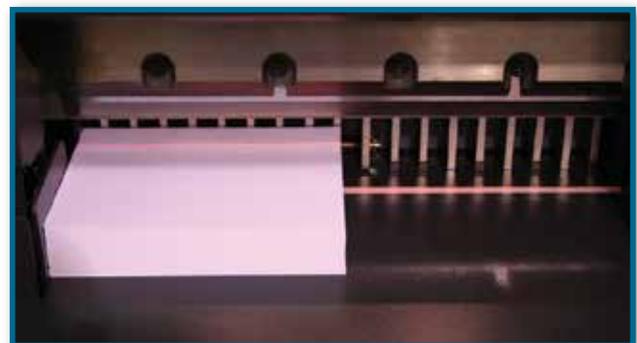

A high contrast RED LED line-light (Titan 200 and 230 only) allows for better visibility and long service life.

PAPER CUTTERS

ERGONOMIC

Along with all the other ergonomic features, Challenge's EXCLUSIVE **Ergo-Touch Cut Button option** provides protection from one of the most repetitive movements required of a cutter operator - the continual pressing of the cut buttons during the cut cycle. The Ergo-Touch cut button system requires the same dual handed interaction from the operator but does not require him/her to hold in place a spring pressured button. This system only requires that the operator's finger be present in each cut switch device during the cut cycle providing ergonomic relief on the operator's hands and wrists.



Challenge Exclusive Ergo-Touch Button (optional)

TITAN 265 CONTROLLER AVAILABLE AS AN OPTION FOR THE 200 AND 230



FEATURES

- 10.5" Color Touch Screen controller
- Clean and easy to use with operator prompts and assistance
- Unlimited program storage capacity
- Programmable Clamp pressure control per cut
- Ethernet ports to communicate with central servers - network ready
- USB port for simple thumb drive program entry
- Receives .csv files from common market spreadsheet software making offline programming and memory storage simple to implement
- Repeat and Loop commands greatly simplify program entry
- Software runs on a real time operating platform with Challenge proprietary software
- Faster backgauge speed

FLEXIBLE

The system's strong **hydraulic unit** powers both clamp and knife for reliable and consistent force. The **clamp pressure is adjustable** allowing the clamping force to be adjusted to match the unique requirements of each job. **Electric clamp pressure control** (standard for 265 / optional for 200 and 230) can adjust clamping pressure conveniently from the controller. Challenge's exclusive **fraction data entry** allows for fractions to be entered and automatically calculated to decimal equivalents. Knife changing and adjustment is easy and quick thanks to the slotted knife bar design and dual knife adjustment bolts. False Clamp plate installation and removal is just as quick because it can be done from the front of the machine.

SMART

The advanced computer system monitors and diagnoses cutter operations. Sophisticated sensors detect backgauge position and mechanical cutting sequences. If a problem is detected, the computer will shut down the machine and display an appropriate error message to simplify troubleshooting.

TITAN 200 AND 230 CONTROLLER



FEATURES

- Menu-Driven prompted LCD Control Screen
- Digital Backgauge Position Indication
- 99 Programs, 9,801 Total Cut Memory
- Light Touch electronic keypad
- Program screen displays job number and name, next 8 cuts of program, and backgauge position
- Simple and easy to operate
- Software runs on a real time operating platform with Challenge proprietary software

SPECIFICATIONS

	TITAN 265	TITAN 230	TITAN 200
Maximum Cutting Width	26-1/2" / 67.3 cm	23" / 58.4 cm	20" / 50.8 cm
Minimum Cut: without false clamp plate with false clamp plate	5/8" / 16 mm 1-7/8" / 48 mm	1/2" / 13 mm 1-7/8" / 48 mm	1/2" / 13 mm 1-7/8" / 48 mm
Maximum Cut Depth	28" / 71.1 cm	24" / 61.0 cm	20" / 50.8 cm
Clamp Opening: without false clamp plate with false clamp plate	4" / 10.2 cm 3-3/4" / 9.5 cm	3-1/4" / 8.3 cm 3" / 7.6 cm	3-1/4" / 8.3 cm 3" / 7.6 cm
Clamp Force: minimum maximum	1,470 lbs / 652 daN 4,000 lbs / 1,800 daN	1,250 lbs / 563 daN 2,500 lbs / 1,125 daN	1,250 lbs / 563 daN 2,500 lbs / 1,125 daN
Clamping Method Backgauge Control	Hydraulic & Power Soft Clamp Power	Hydraulic & Manual Power	Hydraulic & Manual Power
Knife Cycle Speed	26 cuts/min	20 cuts/min	20 cuts/min

DIMENSIONS

Table Space: in front of knife behind knife	24-1/2" / 62 cm 28" / 71.1 cm	24-1/4" / 61.6 cm 24" / 61.0 cm	15-1/4" / 38.7 cm 20" / 50.8 cm
Overall Height	59" / 150 cm	53" / 135 cm	53" / 135 cm
Overall Width	54" / 137 cm	50" / 127 cm	36" / 92 cm
Overall Length	69-1/2" / 177 cm	66" / 168 cm	49" / 124 cm
Side Tables Optional Side Tables	13-1/2" x 16" / 34.3 x 40.6 cm	13-1/2" x 16" / 34.3 x 40.6 cm 18"x20" / 46 x 51 cm	8-1/4" x 12-1/4" / 21 x 31 cm
Minimum opening required thru door: Table, treadle & light beam off:	54" / 137 cm 31" / 79 cm	43" / 109 cm 29" / 74 cm	36-1/4" / 92 cm 29" / 74 cm
Net Weight (approximate)	1780 lbs / 808 kg	1000 lbs / 454 kg	800 lbs / 363 kg
Shipping Weight (approximate)	2020 lbs / 917 kg	1250 lbs / 567 kg	920 lbs / 418 kg

ELECTRICAL CE

Titan 265 Motor 5 H.P., 208/230 Volts, 60 Hz, 3 Phase, AC, 25 Amps. Service size 30 Amps.

Optional Motors: 5 H.P., 380/415 Volts, 50 Hz, 3 Phase, AC, 15 Amps. Service size 20 Amps.

Titan 230 Motor 1-1/2H.P., 230 Volts, 60 Hz, 1 Phase, AC, 12 Amps. Service size 15 Amps. Requires receptacle type: NEMA6-15R or 6-20R. (Optional 50 Hz, 1 phase available)

Titan 200 Motor 1-1/2H.P., 230 Volts, 60 Hz, 1 Phase, AC, 12 Amps. Service size 15 Amps. Requires receptacle type: NEMA6-15R or 6-20R. (Optional 50 Hz, 1 phase available)

Challenge reserves the right to make changes to any product or specification without notice and without incurring responsibility to existing units. Challenge and Titan are registered trademarks of The Challenge Machinery Company.



THE CHALLENGE MACHINERY COMPANY
6125 Norton Center Dr. Norton Shores, MI 49441 USA

Phone: 231.799.8484 Fax: 231.798.1275

www.challengemachinery.com